



*Featured machines in photo may include additional equipment.

Engine	Cummins 6BTAA5.9-C160
Rated Power	118 kW (158 hp / 160 ps) @ 2,200 rpm
Blade Width	3,660 mm
Maximum Speed	42 km/h
Draw Bar Pull	69 kN
Operating Weight	12,600 kg

4140D MOTOR GRADER

4140D SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 2 / Stage II
Manufacturer	Cummins
Model	6BTAA5.9-C160
Rated Power	118 kW (158 hp / 160 ps) @ 2,200 rpm
Maximum Torque	670 N·m @ 1,500 rpm
Number of Cylinders	6
Aspiration	Turbo & air-to-air intercooled

TRANSMISSION	
Transmission Type	Power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	42 km/h
Maximum Travel Speed, rev	26.5 km/h
Number of Speeds, fwd	6
Number of Speeds, rev	3

AXLES	
Differential Type	Limited slip standard
Final Drive Type	Chain drive
Axle Oscillation	±16°
Front Axle, Wheel Lean Angle	Left / right 18°

STEERING	
Steering Configuration	Load sensing steering
Steering Relief Pressure	17.2 MPa
Minimum Turning Radius	6,900 mm
Steering Angle	±50°
Frame Articulation Angle	±27°

BRAKES	
Service Brake Type	Drum brake
Service Brake Location	Rear axle

TIRES	
Tire Size	13.00-24

HYDRAULIC SYSTEM	
Main Pump Type	Gear
Main Relief Pressure	20 MPa
Main Pump Flow	122 L/min

WORKING CAPACITIES	
Maximum Draw Pull	69 kN
Cutting Pressure	6,000 kg

TANDEM DRIVE PERFORMANCE	
Height	560 mm
Width	210 mm
Center Distance	1,540 mm



MOLDBOARD PERFORMANCE	
Bank Cut Angle	28~74°
Moldboard Lift Above Ground	520 mm
Moldboard Side Shift, left/right	565 / 605 mm
Maximum Sloping Angle	90°
Cutting Depth	600 mm
Circle Rotation	360°
Circle Diameter	1,265 mm
Circle Thickness	130 mm

DIMENSIONS	
Wheelbase	5,930 mm
Overall Length	8,660 mm
Overall Width	2,560 mm
Overall Height with Cab	3,350 mm
Clearance under Front Axle	577 mm
Moldboard Standard Length	3,660 mm
Moldboard Standard Thickness	19 mm
Moldboard Standard Height	570 mm

OPERATING WEIGHTS	
Operating Weight	12,600 kg

SERVICE CAPACITIES	
Fuel Tank	348 L
Engine Oil	18 L
Cooling System	35 L
Hydraulic Reservoir	115 L
Transmission and Torque Converter	33 L
Tandems, each	26 L

OPTIONAL EQUIPMENT	
Rear Ripper	
Front Dozer	
Automatic Leveling System	
Rotary Beacon	
Frictional Flake Worm Box	

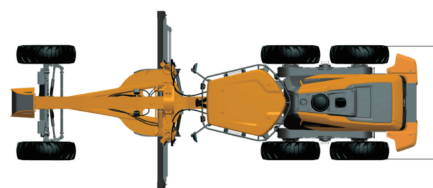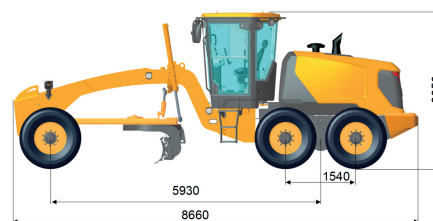

Unit : mm

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

01/2024 Designed by LiuGong
Replace the previous versions of 03/2023